

GMT220 Series Carbon Dioxide Transmitters for Industrial Applications



The GMT220 transmitters withstand harsh and humid environments.

Features/Benefits

- Incorporates Vaisala CARBOCAP® - the silicon-based NDIR sensor
- IP65 protected against dust and spray water
- Several measurement ranges
- Easy installation
- Standard analog outputs and two configurable relays available

Applications include:

- Horticulture and fruit storage
- Greenhouses and mushroom farming
- Safety alarming and leakage monitoring
- Demand controlled ventilation in harsh environments

The Vaisala CARBOCAP® Carbon Dioxide Transmitter Series GMT220 is designed to measure carbon dioxide in harsh and humid environments. The housing is dust- and waterproof to IP65 standards.

The GMT220 series transmitters incorporate the advanced Vaisala CARBOCAP® Sensor. The patented sensor has unique reference measurement capabilities. Its critical parts are made of silicon; this gives the sensor outstanding stability over both time and temperature. By lengthening the calibration intervals, the user saves both time and money.

Interchangeable Probes

The user has a choice of measurement ranges up to 20% of CO₂. The GMT221 is for higher concentrations of CO₂ and the

GMT222 for lower concentrations of CO₂. The GMT220 probes are interchangeable. They can be removed and reattached or replaced at any time – without the need for calibration and adjustment. The probes can be attached directly to the transmitter body or, when used with a cable, installed remotely into hard-to-reach places or areas with dangerously high levels of CO₂. The interchangeability of the GMT220 transmitter's probes truly facilitates field maintenance.

The end user can carry out field maintenance without any additional equipment or heavy and expensive calibration gas bottles by simply replacing a probe.

Probes that have been replaced can be sent to Vaisala for recalibration.

Technical Data

Performance

Measurement Ranges	
GMT221	0 ... 2 %
for high concentrations	0 ... 3 %
	0 ... 5 %
	0 ... 10 %
	0 ... 20 %
GMT222	0 ... 2000 ppm
for low concentrations	0 ... 3000 ppm
	0 ... 5000 ppm
	0 ... 7000 ppm
	0 ... 10 000 ppm
Accuracy (including repeatability, non-linearity and calibration uncertainty) at 25 °C and 1013 hPa	
GMT221	±(1.5 % of range + 2 % of reading)
(applies for concentrations above 2 % of full scale)	
GMT222	±(1.5 % of range + 2 % of reading)
Temperature dependence, typical	-0.3 % of reading / °C
Pressure dependence, typical	+0.15 % of reading/hPa
Long-term stability	<±5 %FS/2 years
Response time (63 %)	
GMT221	20 seconds
GMT222	30 seconds
Warm-up time	30 seconds, 15 minutes full specifications

Inputs and Outputs

Outputs	0 ... 20 or 4 ... 20 mA and 0 ... 10 V
Resolution of analog outputs	12 bits
Recommended external load:	
current output	max. 400 Ohm
voltage output	min. 1 kOhm
Two pre-or user-defined relay outputs	
Relay contacts	max. 30VAC/60VDC, 0.5A
Connections	screw terminals, 0.5 ... 1.5 mm ²
Operating voltage	16 ... 35 VDC or 24 VAC (±20%)
Power consumption	<4 W

Operating Environment

Operating temperature	-20 ... +60 °C (-4 ... +140 °F)
with display	0 ... +50 °C (+32 ... +122 °F)
Storage temperature	-30 ... +70 °C (-22 ... +158 °F)
Operating pressure (compensated range)	700 ... 1300 hPa
Humidity	0 ... 100 %RH, non-condensing
Electromagnetic compatibility	EN61326-1, Generic Environment

Mechanics


Housing material	
transmitter body	ABS plastic
probe	PC plastic
Housing classification	IP65
Weight:	
GMT221	max. 280 g
GMT222	max. 300 g
Probe cable length	2 m and 10 m (optional)

Accessories

Spare probe	GMP221, GMP222 (use the order form to define measurement range etc.)
Clips (2 pcs) for attaching the probe	25245GM
Mounting flange for the probe	GM45156SP
Probe cables	
2 m	25665GMSP
10 m	210848GMSP
Calibrator for interchangeable probes	GMK220
Wall Assembly Plate	GM45160
In-soil adapter for probe	211921GM
Serial COM adapter	19040GM
Calibration adapter for probe	26150GM

Dimensions

Dimensions in mm (inches)

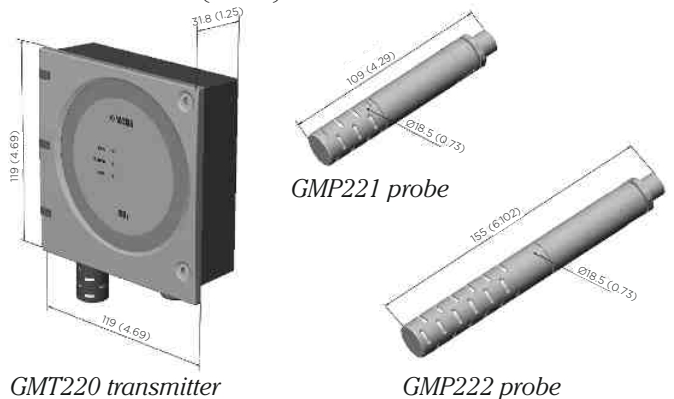

VAISALA

www.vaisala.com

Please contact us at
www.vaisala.com/requestinfo



Scan the code for
 more information

Ref. B210827EN-E ©Vaisala 2013
 This material is subject to copyright protection, with all copyrights retained by Vaisala and its individual partners. All rights reserved. Any logos and/or product names are trademarks of Vaisala or its individual partners. The reproduction, transfer, distribution or storage of information contained in this brochure in any form without the prior written consent of Vaisala is strictly prohibited. All specifications — technical included — are subject to change without notice.

